


FOR TREATMENT OUTSIDE R.O.W. COORDINATE
WITH ENGINEER & OBTAIN RIGHTS OF ENTRY

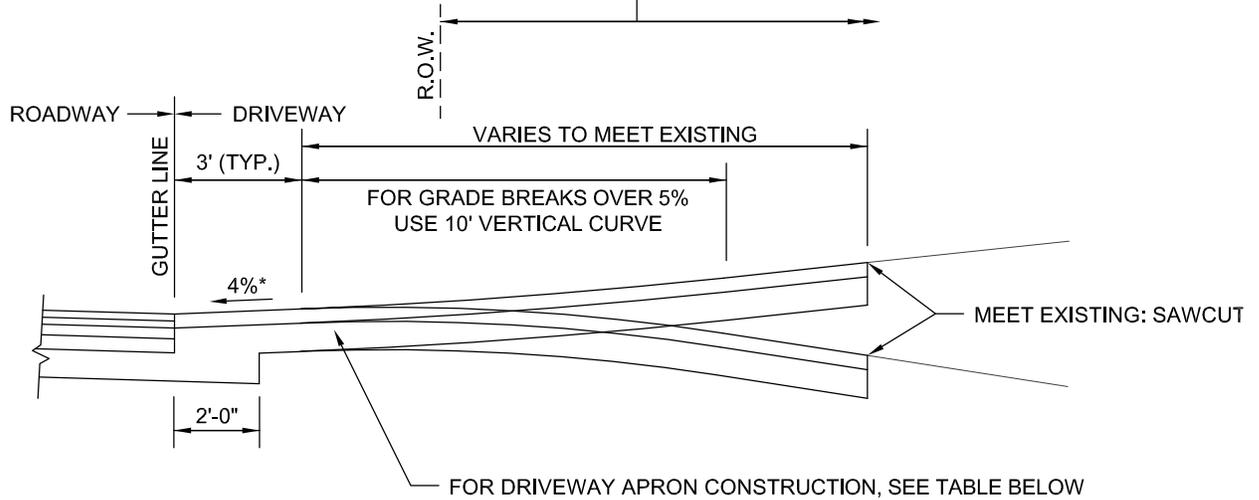

NOTE: FOR PLAN, SEE DRAWING RS.09

DRIVEWAY APRON CONSTRUCTION		
	CEMENT CONCRETE CONSTRUCTION	HOT MIX ASPHALT
SURFACE:	6" CEMENT CONCRETE, 4,000 PSI, FIBER MESH PER CONSTRUCTION STANDARDS SECTION 5.2.10	4" HOT MIX ASPHALT (2" TOP COURSE MATERIAL OVER 2" BINDER COURSE MATERIAL)
SUBBASE:	8" GRAVEL BORROW (TYPE "B")	8" GRAVEL BORROW (TYPE "B")

R.O.W. = RIGHT OF WAY

* - DRIVEWAY APRON SLOPE TOWARDS ROADWAY MAY VARY TO MEET FIELD CONDITIONS; 1" LIP FOR CEMENT CONCRETE DRIVEWAYS

DRIVEWAY APRONS SHALL BE CONSTRUCTED OF HOT MIX ASPHALT OR CEMENT CONCRETE, UNLESS PRIOR WRITTEN APPROVAL IS GRANTED BY DPW.



TOWN OF FRAMINGHAM
DEPARTMENT OF PUBLIC WORKS

FULL DEPTH DRIVEWAY
APRON - SECTION
NO SIDEWALK

DATE:
FEB. 2010

REV:
0

DETAIL NO.

R-5.4.1