


SINGLE FACE*

POST DETAIL

* WHEN PLACED IN MEDIAN, CHANGE TO THRIE BEAM, AND CHANGE HEIGHT TO 2'-8 1/2" ± 1"

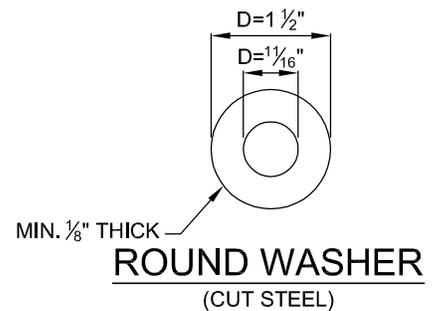

NOTES:

1. POST SPACING, APPROACH END & TRAILING ENDS ARE THE SAME AS THOSE SHOWN FOR STEEL "H" POSTS PER MHD 401.9.0.
2. ALL NUTS, BOLTS & WASHERS ARE TO BE GALVANIZED.
3. ALL SPLICES ARE TO BE MADE AT POSTS.

NOT TO SCALE



TOWN OF FRAMINGHAM
DEPARTMENT OF PUBLIC WORKS

GUARD RAIL
(SINGLE FACE)

DATE:
SEPT. 2008

REV:
0

DETAIL NO.

R-5.2.0