



TEMPORARY PAVEMENT RESTORATION

PERMANENT PAVEMENT RESTORATION


EXAMPLE OF THREE INDIVIDUAL EXCAVATIONS

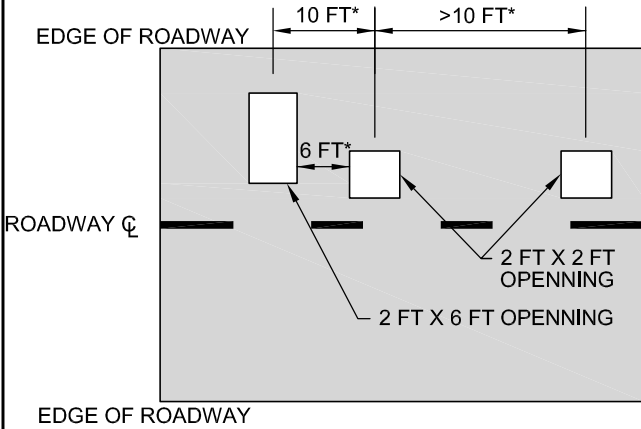


CONTINUOUS ZONE (CZ) RESTORATION: SAWCUT AND COLD PLANE MINIMUM 2 INCH DEPTH, REMOVE TEMPORARY PAVEMENT TO GRAVEL BASE UNLESS OTHERWISE APPROVED BY DPW, PLACE PERMANENT PAVEMENT.

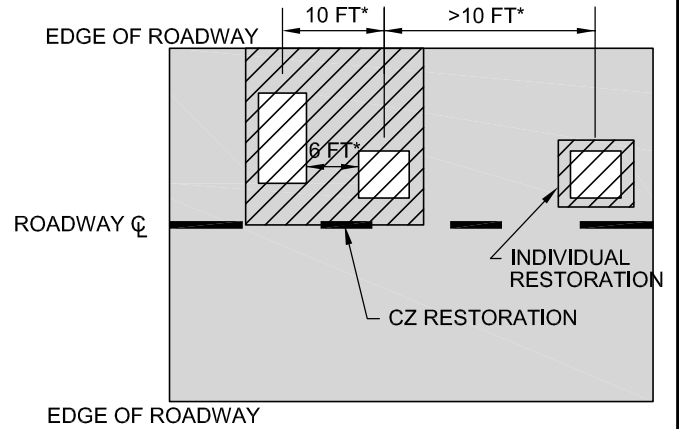



EXAMPLE OF TWO INDIVIDUAL EXCAVATIONS

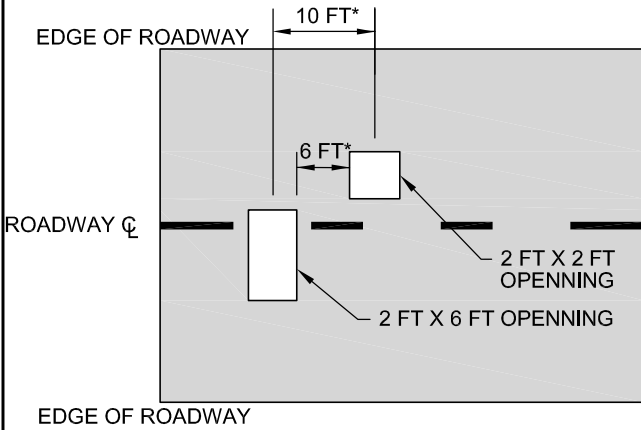

CONTINUOUS ZONE (CZ) RESTORATION: SAWCUT AND COLD PLANE MINIMUM 2 INCH DEPTH, REMOVE TEMPORARY PAVEMENT TO GRAVEL BASE, PLACE PERMANENT PAVEMENT.

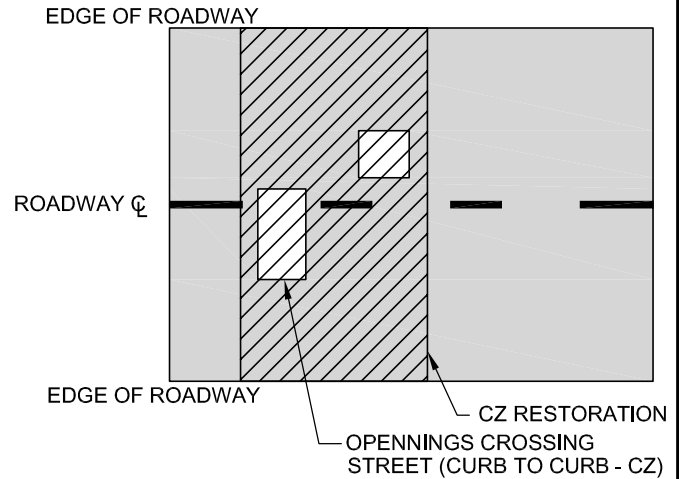

EXAMPLE OF TWO INDIVIDUAL EXCAVATIONS

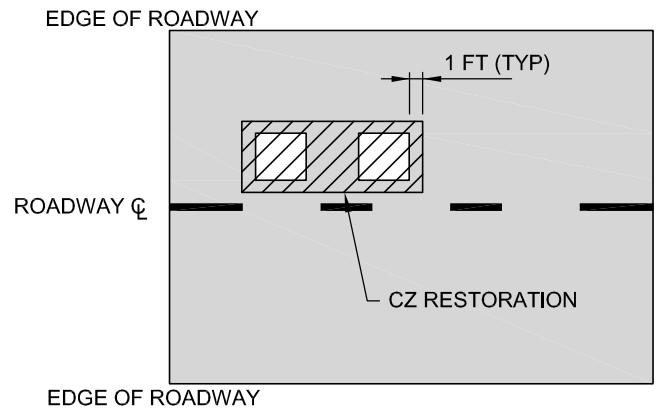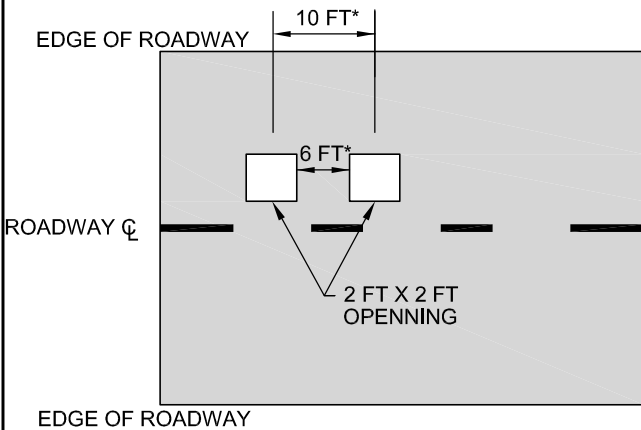

* CONTINUOUS ZONE (CZ) RESTORATION REQUIRED WHEN ϕ OF TRENCH OPENNINGS ARE <10 FEET OR IF OUTER EDGE OF TRENCH OPENNINGS ARE <6 FEET.

** FOR PAVEMENTS RECENTLY REHABILITATED, THE TOWN MAY REQUIRE HIEGHTENED PAVEMENT RESTORATION REQUIREMENTS.



TOWN OF FRAMINGHAM
DEPARTMENT OF PUBLIC WORKS

CONTINUOUS ZONE (CZ)
TRENCH RESTORATION

DATE:
MARCH 2011

REV:
0

DETAIL NO.

R-5.1.8